




PRODUCT SPECIFICATION

PRODUCT: Cord-O-Lite™, see table below for catalog numbers and construction details.
DESCRIPTION: Temporary lighting string, with molded lampholders attached to 12/3 SJTW flexible cord. An attachment plug cap and cord connector are provided.
APPLICATIONS: Temporary indoor and outdoor illumination in accordance with the NEC
APPROVALS: UL Listed; meets OSHA and NEC requirements

CONSTRUCTION PARAMETERS:

Conductor: 12 AWG, 65/30 stranding, bare copper
 Cable insulation and jacket material: PVC
 Cable jacket color: Yellow

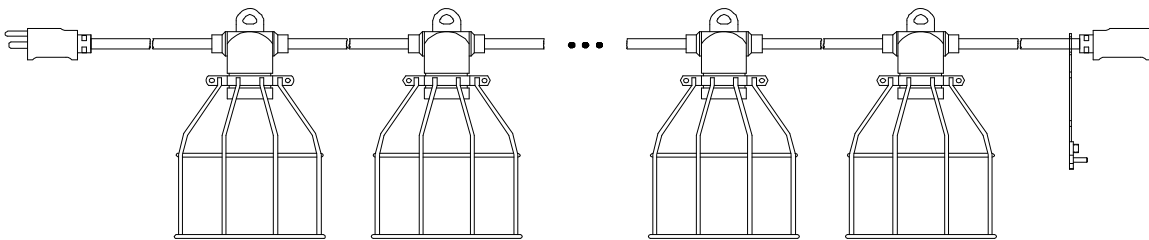

Note: Plug and connector style may vary.

Lampholder spacing (nom): 10 feet, starting 9 ft from the plug
 Lampholder molding compound: High temperature PVC, black
 Plug and connector material: PVC

ELECTRICAL PROPERTIES:

Cable temperature rating: -40 to +60° C
 Nominal operating voltage: 125 VAC
 Lamp type: 150 W (max), A-23 or larger
 Maximum string wattage: 1875 W (NEMA 5-15) or 2500W (NEMA L5-20)

CATALOG NUMBER TABLE:

Catalog #	Cable length	Lampholders	Plug and connector		Guard
07538	50 ft	5	NEMA 5-15	Yellow	Metal
07539	100 ft	10	NEMA 5-15	Yellow	Metal
07548	50 ft	5	NEMA 5-15	Yellow	Plastic
07549	100 ft	10	NEMA 5-15	Yellow	Plastic
07558	50 ft	5	NEMA L5-20	Black	Metal
07559	100 ft	10	NEMA L5-20	Black	Metal
07568	50 ft	5	NEMA L5-20	Black	Plastic
07569	100 ft	10	NEMA L5-20	Black	Plastic

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.